

.....

SPECIFICATION FOR APPROVAL

CUSTOMER	
DESCRIPTION	
CUSTOMER PART NO	
DATE	

APPROVED SIGNATURES)

APPROVAL)	ENGINEERING)	QC
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>




.....

☆ 成品外形和包装图示



&\$* \$

F9J	89G7F=DH=CB	85H9
D#\$		E
D#%		E

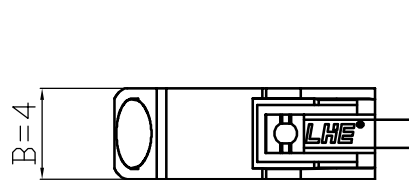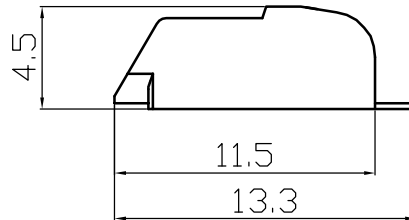

D' 7" 6 @5MCI H

AU] b' GdYVY Z] VU[h] cbg

fIdc' YgE. % hc' ' D
 fI7i ffYbh' fUh] b[E. ' + "\$5
 fUc' hU[Y' fUh] b[E. ' '\$J
 fH'YadYfUhi fY' fUb[YE. ' ! * \$ ' hc' Z%\$)
 fI5dd'] WVV' Y' k] fYE. ' 5K: ' , &(' hc' , %

Dc' Yg	DUFh' Bc"	8-A15	8-A16
%	&\$* \$! G\$%		(" \$\$
&	&\$* \$! G\$&	(" \$\$," \$\$
'	&\$* \$! G\$'	," \$\$	%&' \$\$

&			%	
%		@7D	%	
	#			
		LHE [®]		
"v w' v "		N<9>=5B; '@=5B<9' 9@97HFCB=7G' 7C' ž@4B		
2\$ ' z % 2%)\$ 2)\$ %&\$	8Ygl [b l b] hq	G=N9		
w\$"% w\$"% w\$'' w\$')	mm Only	5(
			DUFh' Bc	
			&\$* \$! G\$%	

%) % (% & % % \$ - , + *) (' & %

A

@

?

>

<

:





:

9

7

6


5

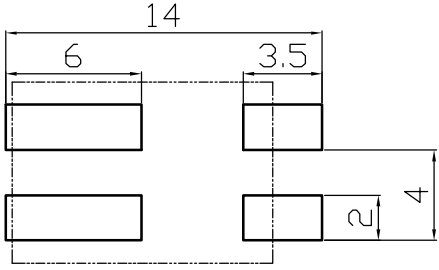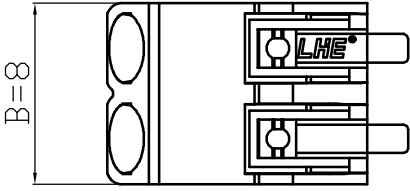
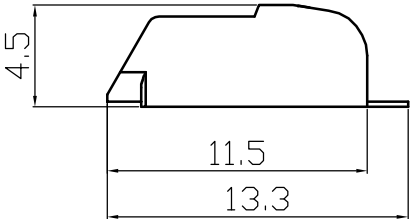


D' 7" 6' @5MCH

"v w' v " v w\$") v	L [E] L			
		8ygl b l b hg	G=N9	
	mm Only		5(
				DUFh' Bc

%) % (% & % % \$ - , + *) (' & %





Version Number: A

PRODUCT SPECIFICATION

Part Number: 2060 **Specifications**

- 1 Poles: 1 to 3P
- 2 Current rating: 7.0A
- 3 Voltage rating: 300V
- 4 Temperature range: -60 to +105
- 8 Applicable wire: AWG #24 to #18

产品		Performance test	
	Item	Test Condition	Requirement
1	Appearance	Visual by eye Light: 1.0 Lamp: 200-300Lx Space: 0.3-0.5m	1. Plastic part: smooth and flat surface without discolor, broken, crack distortion defects is acceptable. 2. Metal part: bright and even surface without rust, oxide, fog and obvious physical damage defects is acceptable. 3. Wire: clearing surface without discolor, broken defects, indistinct words and mark is acceptable.
2	Contact Resistance	Mate connectors, measure by dry circuit.	20m MAX
3	Insulation Resistance	500V DC Apply 500V DC between adjacent terminal or ground.	800M MIN
4	Dielectric Strength	1000V AC (), 1mA 1min Mate connectors apply 1000V AC for 1 minute between adjacent terminal or ground.	No Breakdown

ZHEJIANG LI ANHE ELECTRONICS CO., LTD

pin a Requirement Number:
Version Number. _____

2060

Version Number: A

PRODUCT SPECIFICATION

Part Number: 2060

产品		Performance test	
	Item	Test Condition	Requirement
13	Salt Spray	5%±1() 16 1 2 16 hour exposure to a salt spray from the 5%±1 solution.	() Appearance: No Damage (No erosion with material exposed. And with plating material, slight erosion on the cutting surface acceptable)

Edit _____ Date _____

Check _____ Date _____

Approval _____ Date _____